

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

10/518494

(43) International Publication Date  
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number  
WO 2004/000724 A1(51) International Patent Classification<sup>7</sup>: C01B 3/32, 3/38,  
3/36, 3/48, 3/50, H01M 8/06[JP/JP]; 2-24-6, Ushikubohigashi, Tuduki-ku, Yokohama-  
shi, Kanagawa 224-0014 (JP).(21) International Application Number:  
PCT/JP2003/006682(74) Agent: GOTO, Masaki; Shoyu-Kaikan, 3-1, Kasumi-  
gaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).

(22) International Filing Date: 28 May 2003 (28.05.2003)

(81) Designated States (national): CN, KR, US.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:  
2002-180433 20 June 2002 (20.06.2002) JP

Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments


(71) Applicant (for all designated States except US): NISSAN  
MOTOR CO., LTD. [JP/JP]; 2, Takara-cho, Kana-  
gawa-ku, Yokohama-shi, Kanagawa 221-0023 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): AOYAMA, Takashi

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: FUEL REFORMING DEVICE

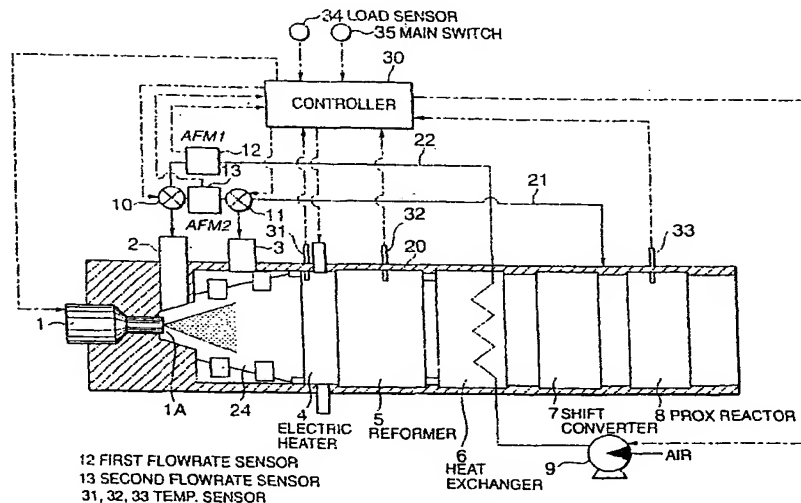

(57) Abstract: A fuel reforming device generates reformat gas containing a large amount of hydrogen by reforming a mixture of a hydrocarbon fuel and air, and supplies the reformat gas to a fuel cell stack (14). The fuel reforming device comprises a fuel injector (1) injecting the hydrocarbon fuel into a fuel mixing chamber (24), first and second air distribution valves (10, 11) supplying air to the fuel mixing chamber (24), and a reformer (5) which generates reformat gas by making the air-fuel mixture supplied from the fuel mixing chamber (24) react in the presence of a reforming catalyst. The reformer (5) is also provided with an oxidation catalyst. When the fuel reforming device starts operating, a large amount of air is supplied from the first and second air distribution valves (10, 11) to the fuel mixing chamber (24), and the oxidation catalyst in the reformer (5) promotes oxidation of the air-fuel mixture to warm up the reformer (5).

## ABSTRACT

A fuel reforming device generates reformat gas containing a large amount of hydrogen by reforming a mixture of a hydrocarbon fuel and air, and supplies the reformat gas to a fuel cell stack (14). The fuel reforming device comprises a fuel injector (1) injecting the hydrocarbon fuel into a fuel mixing chamber (24), first and second air distribution valves (10, 11) supplying air to the fuel mixing chamber (24), and a reformer (5) which generates reformat gas by making the air-fuel mixture supplied from the fuel mixing chamber (24) react in the presence of a reforming catalyst. The reformer (5) is also provided with an oxidation catalyst. When the fuel reforming device starts operating, a large amount of air is supplied from the first and second air distribution valves (10, 11) to the fuel mixing chamber (24), and the oxidation catalyst in the reformer (5) promotes oxidation of the air-fuel mixture to warm up the reformer (5).